


MODULE DIMENSIONS:

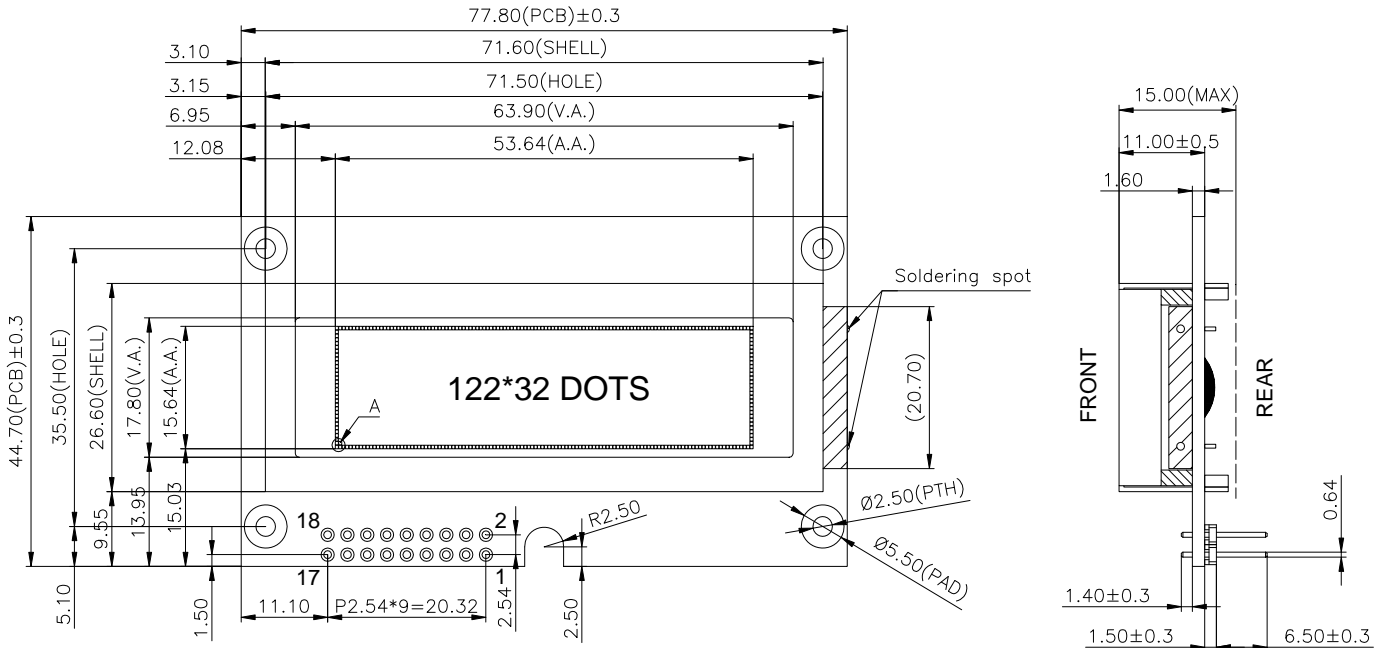


Note:

1. Display Type: STN-GRAY, Positive, Transflective
2. Backlight : LED, White
3. Controller : PT6520, VDD:5.0V
4. Operating Temperature: -30°C ~ +50°C
5. Storage Temperature : -40°C ~ +70°C
6. ROHS
7. Unmarked tolerances : ±0.2mm

Remark: Both display type and backlight color of the LCM can be customized per request.

BLOCK DIAGRAMS:

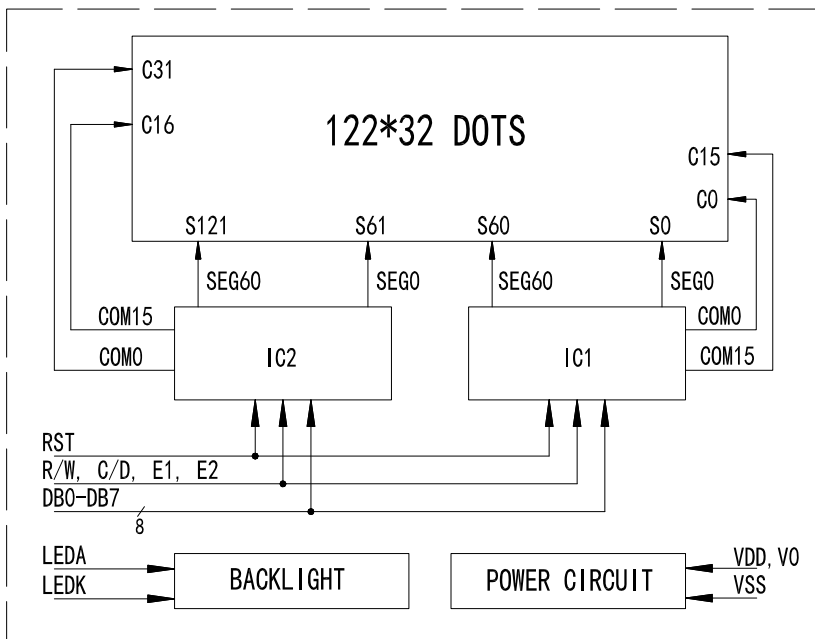

PIN.	SYMBOL
1	VSS
2	VDD
3	V0
4	RST
5	E1
6	E2
7	R/W
8	C/D
9-16	DB0-DB7
17	LEDA
18	LEDK